


**DENNIS/HARWICH  
MAIN STREET (ROUTE 28)**


STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
MA	XXXX	6	95
PROJECT FILE NO.		608742	

**TYPICAL SECTIONS**

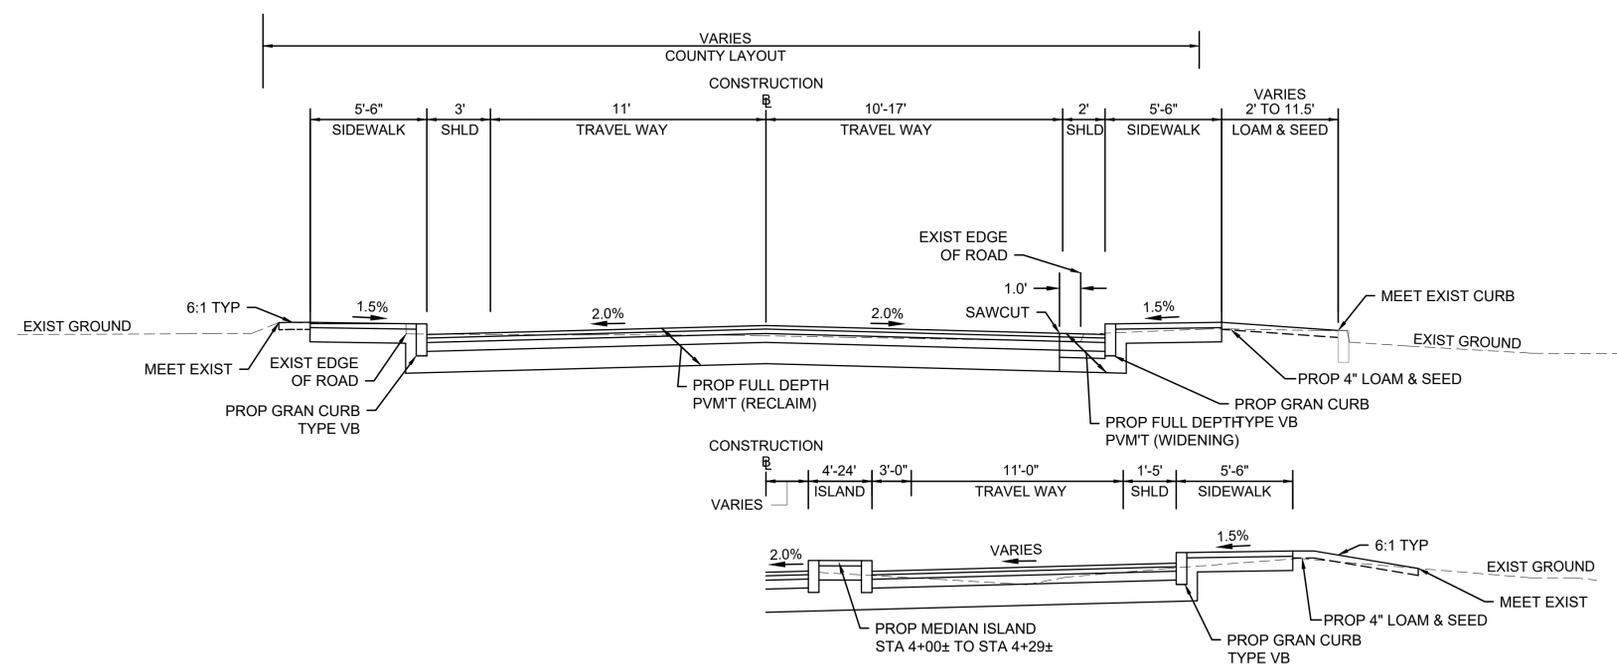


**UPPER COUNTY ROAD**

STA 4+00± TO STA 5+65±  
NTS

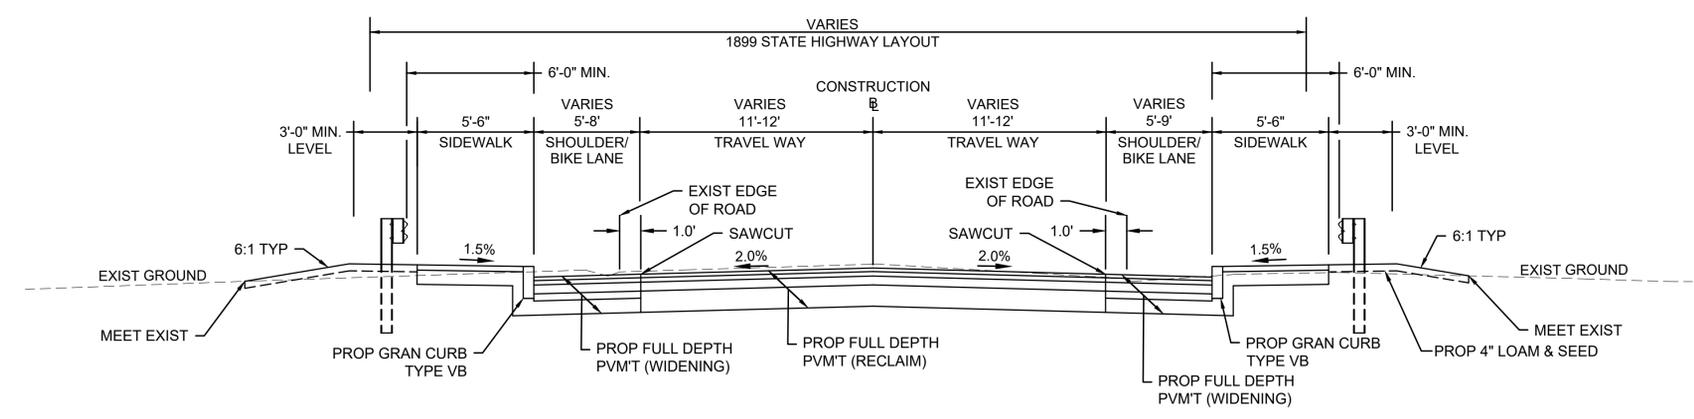

**MAIN STREET (ROUTE 28)**

STA 44+78± TO STA 47+26±  
NTS

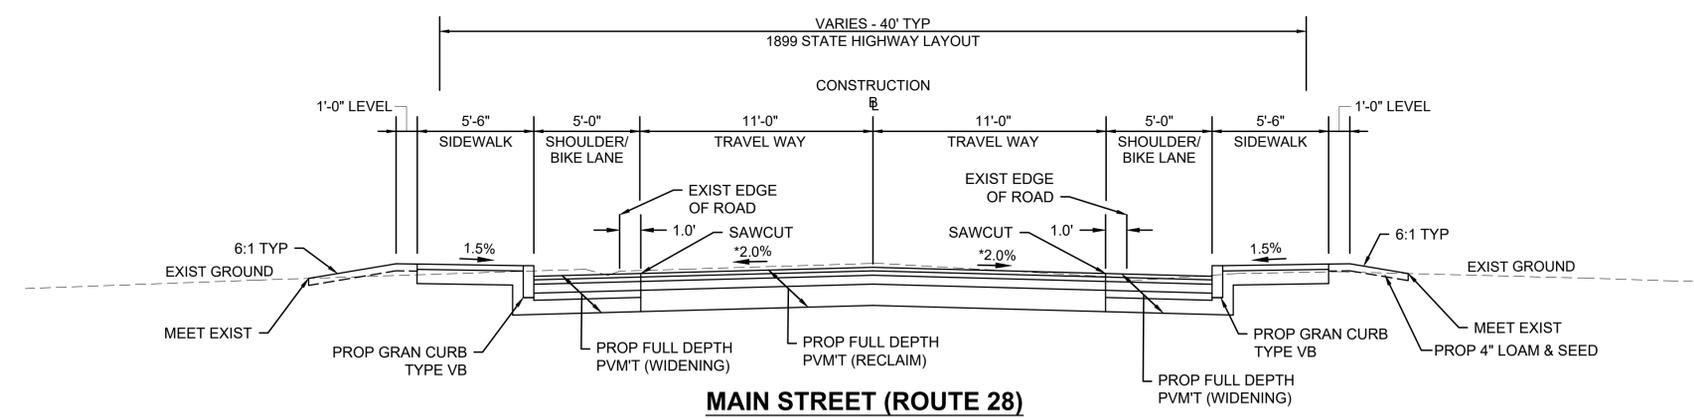

**MAIN STREET (ROUTE 28)**

STA 10+00± TO STA 44+78±  
NTS

\*2% TYPICAL, SEE CROSS SECTIONS FOR VARYING SLOPE FROM STA 10+77± TO STA 12+07±

**PAVEMENT NOTES**

**PROPOSED FULL DEPTH PAVEMENT (WIDENING & RECLAIM)**  
 SURFACE: 2" SUPERPAVE SURFACE COURSE 12.5 POLYMER (SSC-12.5-P) OVER 2.5" SUPERPAVE INTERMEDIATE COURSE 19.0 (SIC-19.0) OVER  
 BASE: 5" SUPERPAVE BASE COURSE 37.5 (SBC-37.5) OVER  
 SUBBASE: 12" RECLAIMED PAVEMENT BORROW (M1.09.0)  
 RECLAIM: EXISTING PAVEMENT SHALL BE RECLAIMED TO A DEPTH OF 15"

**PROPOSED PAVEMENT MILLING AND OVERLAY**  
 SURFACE: 2" SUPERPAVE SURFACE COURSE 12.5 POLYMER (SSC-12.5-P) OVER 2" MAXIMUM PAVEMENT MILLING

**PROPOSED HOT MIX ASPHALT DRIVEWAY**  
 SURFACE: 1 1/2" SUPERPAVE SURFACE COURSE 9.5 (SSC-9.5) OVER 2.5" SUPERPAVE INTERMEDIATE COURSE 12.5 (SIC-12.5)  
 FOUNDATION: 8" GRAVEL BORROW, TYPE b

**PROPOSED HOT MIX ASPHALT WALK**  
 SURFACE: 1.25" SUPERPAVE SURFACE COURSE 9.5 (SSC-9.5) OVER 1.75" SUPERPAVE INTERMEDIATE COURSE 12.5 (SIC-12.5)  
 FOUNDATION: 8" GRAVEL BORROW, TYPE b

**PROPOSED BRICK WALK**  
 SURFACE: 2.25" WIRE CUT BRICK PAVER OVER NEOPRENE-MODIFIED ASPHALT OVER BITUMINOUS SETTING BED  
 BASE: 4" CEMENT CONCRETE AIR ENTRAINED 4000 PSI, 3/4", 610  
 SUBBASE: 8" GRAVEL BORROW, TYPE b

**PROPOSED CEMENT CONCRETE WHEELCHAIR RAMP**  
 SURFACE: 4" CEMENT CONCRETE AIR ENTRAINED 4000 PSI, 3/4", 610  
 SUBBASE: 8" GRAVEL BORROW, TYPE b

**GENERAL NOTES:**

- ALL HOT MIX ASPHALT PAVEMENTS SHALL BE CONSTRUCTED IN ACCORDANCE SECTION 450 QUALITY ASSURANCE FOR HMA.
- ASPHALT EMULSION FOR TACK COAT (ITEM 452.), SHALL BE APPLIED FOR TRIPLE COVERAGE IN ACCORDANCE WITH SUBSECTION 450.43 (G) OF THE STANDARD SPECIFICATIONS.
- HMA JOINT ADHESIVE (ITEM 453.) SHALL BE APPLIED IN SURFACE COURSE AT ALL VERTICAL COLD JOINTS PRIOR TO HMA PAVING.
- ALL HOT MIX ASPHALT WALKS AND DRIVEWAYS SHALL BE ESTIMATED AND PAID FOR UNDER ITEM 702 OF STANDARD SPECIFICATIONS FOR HIGHWAYS AND BRIDGES.
- SURFACE PAVING TO BE COMPLETED AT THE END OF THE PROJECT AND AS DIRECTED WHEN IT CAN BE PLACED IN ITS ENTIRETY.
- ALL FRAMES AND SERVICE BOXES SHALL BE ADJUSTED TO INTERMEDIATE COURSE AND ADJUSTED LEVEL WITH SURFACE COURSE PRIOR TO PAVING WITH HMA JOINT SEALANT.